

Lynx 200H

200 Series HVLP Corrosion Control

The Lynx 200H is a high quality general purpose pressure feed sprayer designed for corrosion control applications. This spray gun comes with an all stainless steel fluid passage and can be set up with a variety of nozzle sizes for multiple coating viscosities.

Lynx 200H Features

- ➔ Forged Aluminum Body
- ➔ Stainless Steel Fluid Passages
- ➔ Designed For Corrosion Control
- ➔ Self Adjusting Needle Packing
- ➔ Complies With All HVLP Regulations



1 Quart
Pressure Cup
(Aluminum)
OL200H-303R2



1 Quart
Pressure Cup
(PPS)
OL200H-PPSR2

Lynx 200H

"Preventing Corrosive Agents"

Available Outfits

2 Quart Outfits

(Includes 5' Hose Assemblies)



2 Quart
(Economy)
OL200H-130




2 Quart
(Bandit)
OL200H-600

Tank Outfits

Tank Outfits Include 25' Hose Assemblies and are available in 2.5 gal, 5 gal, 10 gal, 12.5 gal and 15 gal sizes.

(Includes 25' Hose Assemblies)



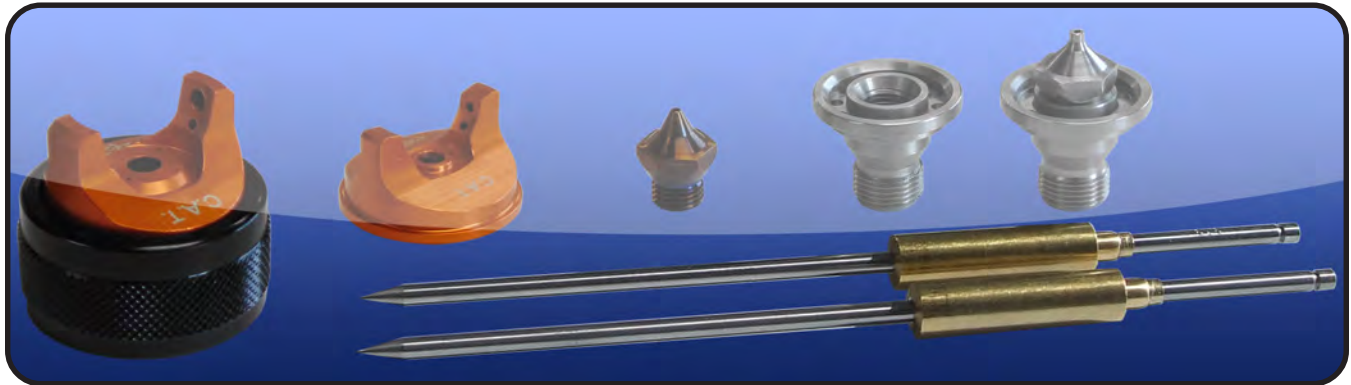

Nozzle Chart for *Lynx 200H*

Material Type	Fluid Orifice x Air Cap	Maximum Pattern Width	Pressure / Siphon
Very Thin less than 16 sec. Zahn #2 inks, dyes, solvents, stains	1.1 mm x 1028	11	P
	1.1 mm x 1033	9	P
Thin 16 to 20 sec. Zahn #2 lacqers, enamels, primers, sealers	1.1, 1.4 mm x 1057	11	P/S
	1.1, 1.4 mm x 1100	12	P/S
Medium 21 to 30 sec. Zahn #2 automotive base coat enamels, primers, epoxies, urethanes, automotive clear coat	1.4 mm x 1057	11	P/S
	1.4 mm x 1100	12	P/S
	1.4 mm x 1046	11	P
	1.4 mm x 1083	13	P
Heavy over 30 sec. Zahn #2 heavy body primers, high solid enamels, high solid automotive coatings, adhesives	1.8, 2.2 mm x 1046	11	P
	1.8, 2.2 mm x 1083	13	P

Air Caps for *Lynx 200H*

Air Caps	Retaining Rings	Max Inlet Pressure	CFM @ Max Inlet Pressure
22-1028	21-1001	29 PSI	18 CFM @ 29 PSI
22-1033		38 PSI	18.75 CFM @ 38 PSI
22-1057		50 PSI	22 CFM @ 50 PSI
22-1100		37 PSI	18 CFM @ 37 PSI
22-1100 X 2.2S		37 PSI	18 CFM @ 37 PSI
22-1046**		47 PSI	22.5 CFM @ 47 PSI
22-1083**		55 PSI	26 CFM @ 55 PSI

*Note: Air cap test gages are available to confirm HVLP compliance.

**Must be used with 32-02XX fluid nozzle tips