

The Panther 200H is a high quality general purpose pressure feed sprayer designed for corrosion control applications. Comes with an all stainless steel fluid passage and is teflon coated, perfect for zinc rich, glues, CARC or any coating that makes clean up difficult.





"Preventing Corrosive Agents"

## 2 Quart Outfits (Includes 5' Hose Assemblies) 2 Quart 2 Quart (Economy) (Bandit) 0P200H-130 0P200H-600

Available Outfits


Tank Outfits Tank Outfits Include 25' Hose Assemblies and are available in 2.5 gal, 5 gal, 10 gal, 12.5 gal and 15 gal sizes. (Includes 25' Hose Assemblies)



Coating Atomization Technologies: 337 S. Arthur Ave. Louisville, CO 80027 Phone: 888.820.4498, Fax: 303.438.5708 www.spraycat.com





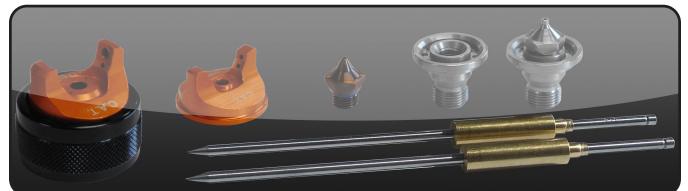

Nozzle Chart for <i>Panther 200H</i>				
Material Type	Fluid Orifice x Air Cap	Maximum Pattern Width	Pressure / Siphon	
Very Thin less than 16 sec. Zahn #2 inks, dyes, solvents, stains	1.1 mm x 1028 1.1 mm x 1033	11 9	P P	
Thin 16 to 20 sec. Zahn #2 lacqers, enamels, primers, sealers	1.1, 1.4 mm x 1057 1.1, 1.4 mm x 1100	11 12	P/S P/S	
Medium 21 to 30 sec. Zahn #2 automotive base coat enamels, primers, epoxies, urethanes, automotive clear coat	1.4 mm x 1057 1.4 mm x 1100 1.4 mm x 1046 1.4 mm x 1083	11 12 11 13	P/S P/S P P	
Heavy over 30 sec. Zahn #2 heavy body primers, high solid enamels, high solid automotive coatings, adhesives	1.8, 2.2 mm x 1046 1.8, 2.2 mm x 1083	11 13	P P	

Air Caps for <i>Panther 200H</i>				
Air Caps	Retaining Rings	Max Inlet Pressure	CFM @ Max Inlet Pressure	
22-1028		29 PSI	18 CFM @ 29 PSI	
22-1033		38 PSI	18.75 CFM @ 38 PSI	
22-1057		50 PSI	22 CFM @ 50 PSI	
22-1100	21-1001	37 PSI	18 CFM @ 37 PSI	
22-1100 X 2.2S		37 PSI	18 CFM @ 37 PSI	
22-1046**	7	47 PSI	22.5 CFM @ 47 PSI	
22-1083**		55 PSI	26 CFM @ 55 PSI	

\*Note: Air cap test gages are available to confirm HVLP compliance.

\*\*Must be used with 32-02XX fluid nozzle tips

