



E-Line application solution

The **WAGNER E-Line** application solution offers the best quality and combines all **WAGNER** components in one economic powder coating system.

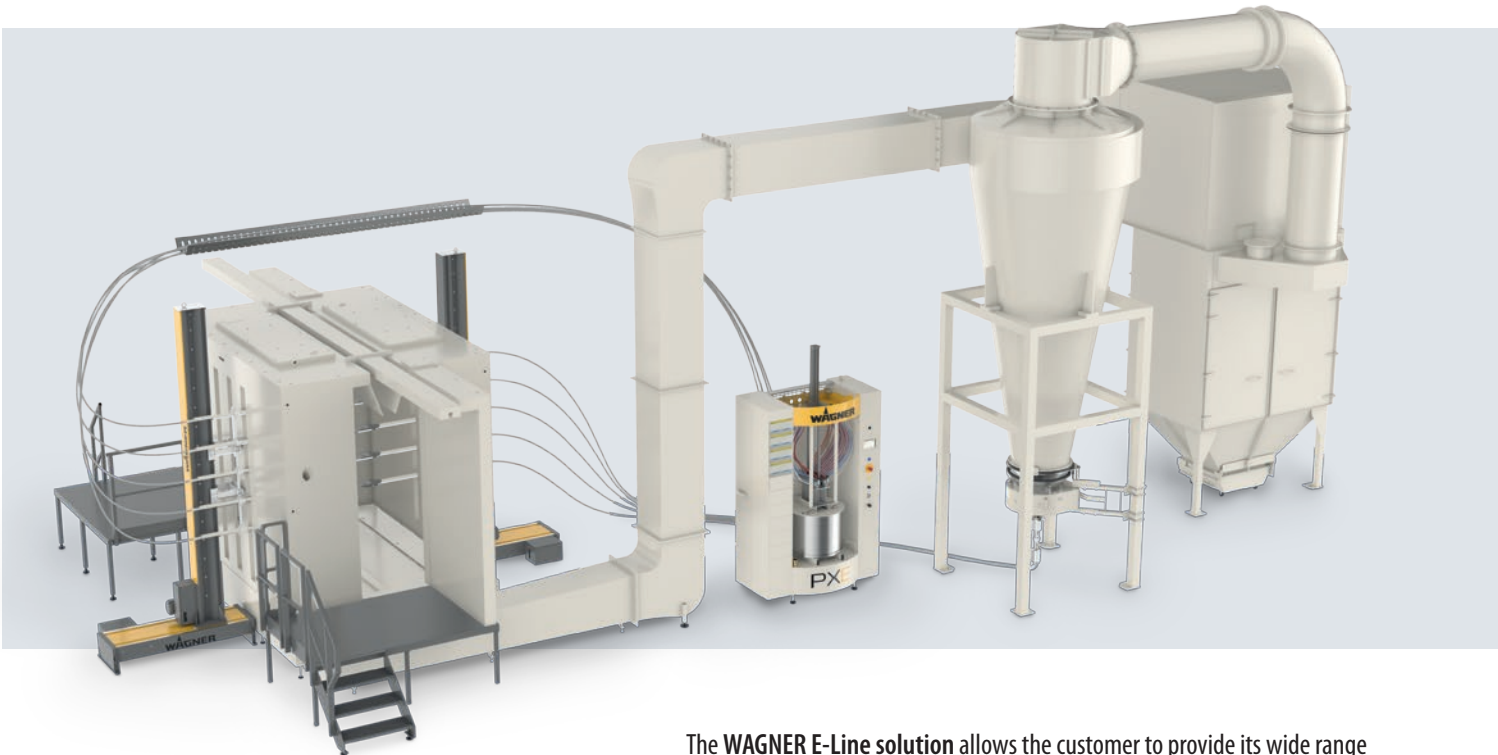

The **WAGNER E-Line solution** allows the customer to provide its wide range of diverse components with a perfect surface. With this highly efficient coating system, you will benefit from high process reliability with consistent results.

- Optimal application results guaranteed with our high-quality key components: Powerful PEA C4 automatic guns, precise EPG S2 modules and an accurate moving system.
- Best airflow & highest transfer efficiency thanks to the special PVC booth construction and optimized inner geometry. Side ducts enable maximum application efficiency.
- Low investment cost with the PXE powder center with integrated all-in-one control and an excellent price-performance ratio.

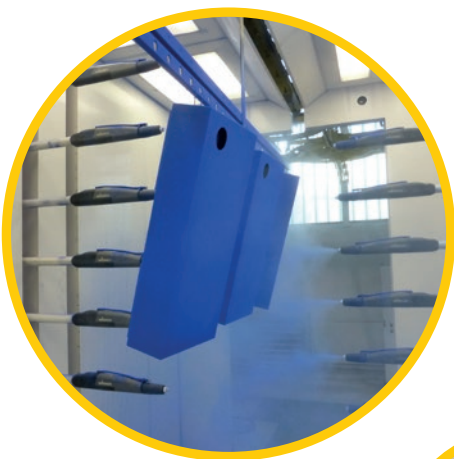

Perfect combination for best results

The WAGNER E-Line application solution offers the best quality and combines all WAGNER components in one economic coating system.

Energy Efficiency Package

Improved recovery rate & minimised pressure loss
Thanks to the bionic elbow pipings and cyclone inset.

Large potential savings
Up to 40% less energy consumption and cost savings.

Maximised production stability
High safety of colour changes without the risk of contamination.

QuickCube powder booth

Flexible layout options

Different booth layouts available with a maximum workpiece size of 2000 x 800 mm.

Production stability

Guaranteed by the WAGNER booth design with PVC sandwich walls.

Homogeneous powder coating



Thanks to the double-sided floor extraction system, the air stream does not affect the powder cloud like most market-based systems.

Optimum airflow & highest transfer efficiency

Special PVC booth construction and optimized inner geometry with the WAGNER floor design. Side ducts ensure maximum application efficiency.

Optimal application results

Guaranteed with our high-quality key components: Powerful PEA C4 automatic guns, precise EPG S2 modules and accurate moving systems.

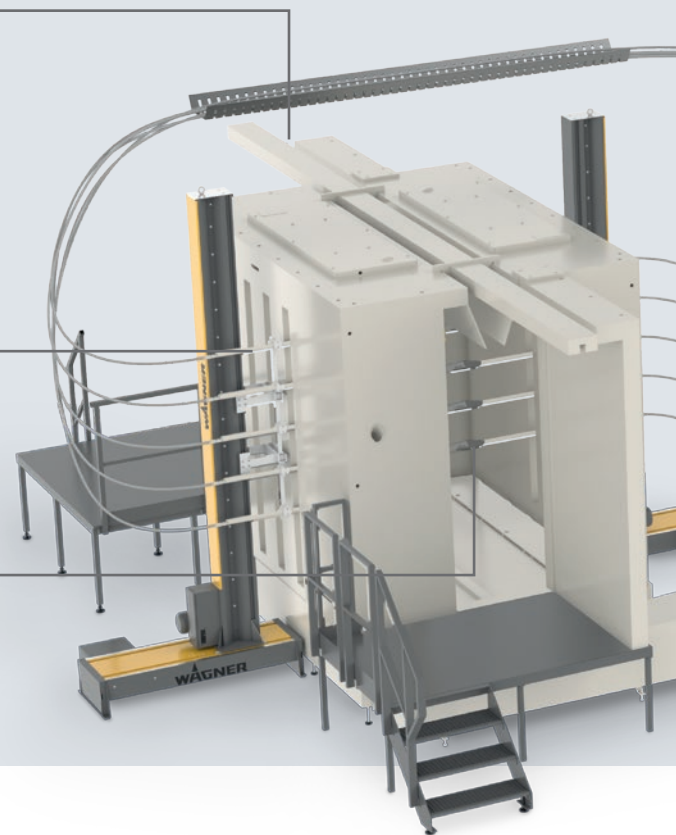

PEA C4 automatic gun

Increased transfer efficiency

The optimized e-static technology ensures efficient powder charging.

Smooth powder output

The gun and nozzle design of the PEA C4 gun guarantees stable coating results.

Flexible application options

A wide range of powders can be applied, including metallic or UDS powder.



PEM-X1 manual gun

Ergonomic handling

Robust and lightweight design (only 490 g).


Production stability

Homogeneous powder cloud for even layer thicknesses.

User-friendly operation

Quick adjustment of the powder quantity and easy program switch via remote control.

E-Line application solution

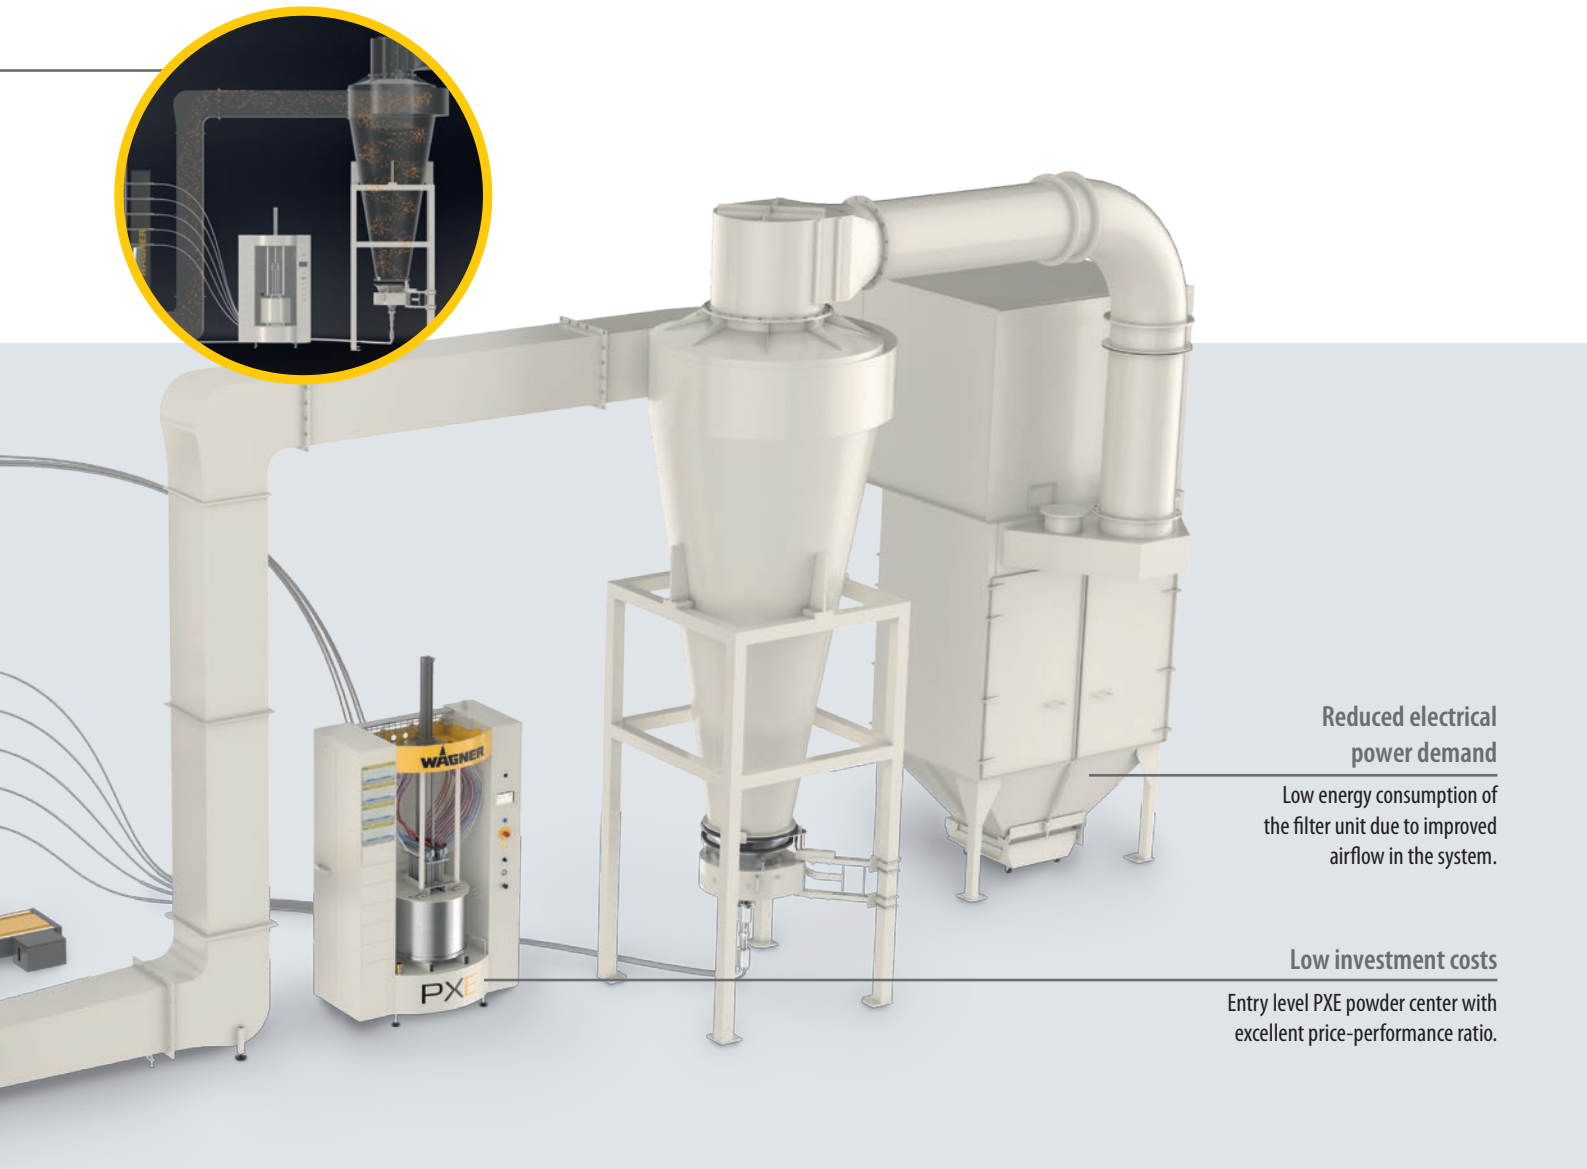

Reduced electrical power demand

Low energy consumption of the filter unit due to improved airflow in the system.

Low investment costs

Entry level PXE powder center with excellent price-performance ratio.



WAGNER PXE

Intuitive handling

The 7" all-in-one touch display allows the whole system to be operated from one central control unit.

Flexible powder feeding

Powder supply directly from the powder box or WAGNER fluidized hopper, depending on customer demands.

Maximum production reliability

Reproducible coating results thanks to integrated recipe control.



Technical data

| | | |
|----------------------------|-------------------------------|---|
| Product portfolio | Powder booth | QuickCube |
| | Powder center | PXE |
| Application | Max. guns | 12 x automatic + 2 x manual or 14 x automatic |
| | Guns | PEA C4 or PEA C4 XL 1.4 |
| | Gun arrangement | 1 x 7 vertical per side or 2 x 3 horizontal per side |
| | Part detection | Gap control (PXE standard) |
| Manual Coater | Gun | PEM-X1 |
| | Manual platforms | 1 x pre-coating / 1 x post-coating |
| Booth | Type of booth | QuickCube |
| | Material | PVC 100 mm sandwich walls |
| | Size | Max . 2000 (H) x 800 (W) |
| | Gun slots max. | 4 per side |
| Moving System | Vertical unit | VU 2-1800 to VU 2-2400 |
| | Horizontal unit | RS 1000 (manual) or HU 1000 (electrical) |
| Feeding/Preparation | Powder center | PXE (standard) or PXE (maximum) |
| | Type of injectors | PI-F1 (80-360 g/min), PI-F1-S (80-450 g/min), HiCoatED (50-250 g/min) |
| | Fresh powder refill | Manually |
| | Sieving of powder | Not available |
| Recovery | Cyclone & filter | 13.000 Nm ³ /h 18,5 kW or 17.000 Nm ³ /h 22 kW |
| | Energy Efficiency Package EEP | Yes, integrated |
| | Recovery | PP25 S - peristaltic pump |
| Control | Control type | All-in-one control |
| | Display size | 7" colour touch display (PXE standard) |
| | Gun control modules | EPG S2 & EPG Sprint X |

Application examples

| Segment fit | Customer application criteria | Solution contribution |
|---|--|---|
| Domestic Appliances, HVAC, White Goods | 1 main color, few others | Feeding from fluidized and vibrated WAGNER stainless steel hopper or directly from carton box |
| ACE & Transport, Accessories, Tractors, Harvesters, Lawn & Garden equipment | Many guns to maximise output | Version with up to 12 PEA C4 guns available plus two manual coating platforms to achieve maximum coating efficiency |
| Metal Products, Furniture, Electrical cabinets, Various small parts | Different colours | By feeding directly from the powder box, the colour change time can be minimised |
| Automotive, Hang-on parts, Springs, Wheels | Reliable application system for automatic powder coating | All-in one control included in the PXE ensures a perfectly harmonised system |
| Infrastructure, Aluminium extrusions, General building components | Constant and smooth powder output and high coating quality | With our EPG S2 modules and the AFC technology, maximum production stability can be achieved |

J. Wagner GmbH
 Industrial Solutions
 D-88677 Markdorf
 T +49 (0) 7544 505 - 0
 F +49 (0) 7544 505 - 200

www.wagner-group.com



DISTRIBUTED BY COATING EQUIPMENT TECHNOLOGY, INC
store.cetinc.com • (586) 210-0555