


DEVILBISS
A **CARLISLE** BRAND

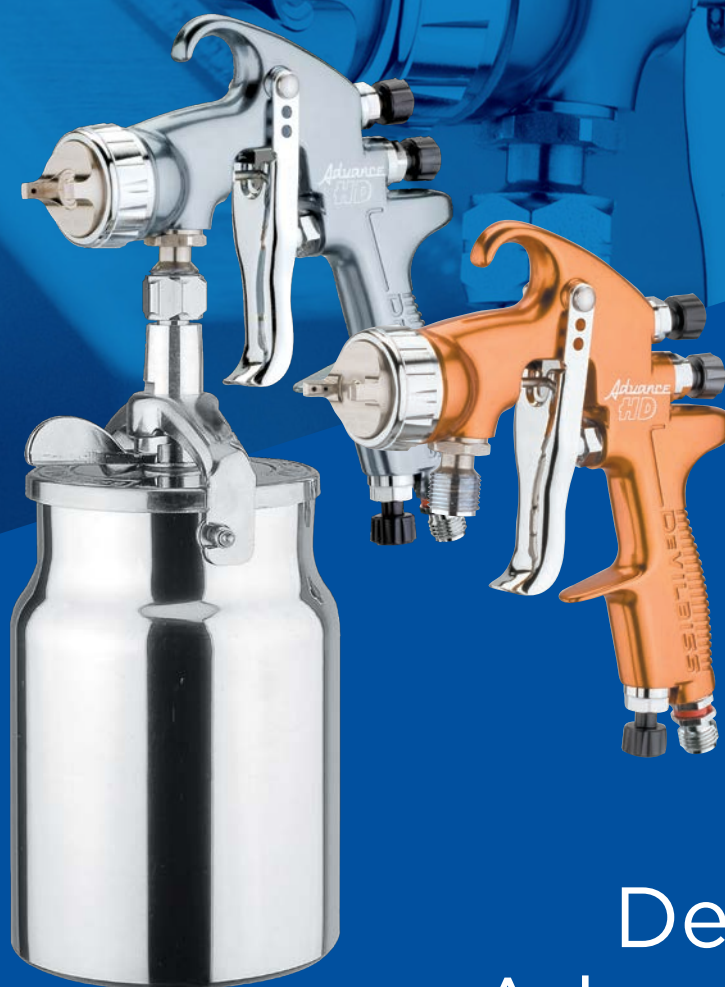

DeVilbiss
Advance HD

The All Purpose
Mid-Sized Spray Gun

DeVilbiss Advance HD

DeVilbiss spray guns have advanced again with our Advance HD spray gun range, suitable for all types of industrial spray finishing applications

Advance HD unrivaled high performance is achieved with new design technology utilizing high capacity air passages with a separate “balanced” air valve to provide an unrestricted flow of compressed air through the gun body. This “free breathing” air movement enables the precision-engineered air caps and fluid tips to produce superior atomization with consistent even distribution throughout the spray pattern.

FEATURES

Advance HD (high demand) spray guns are available in Pressure, Suction and Gravity feed formats

- Robust, lightweight and work friendly design for High Demand outputs
- Contoured handle design greatly reduces RSI and operator fatigue
- Balanced air valve design for lighter trigger pull and improved air flow
- Stainless steel tips, needles and fluid passageways as standard
- CE marked and fully ATEX approved
- Wide range of air caps provide a superior finish with the best possible paint savings and transfer efficiency (compliant or conventional, depending on spray gun range selected)

Significantly raising the benchmark in spray gun performance and productivity

Perfectly balanced, naturally comfortable

The Advance HD is lightweight with a lighter trigger action, increased finger room, and contoured handle design. Advance HD spray guns are precision built by DeVilbiss using the best materials and component parts for a guaranteed, reliable, long and durable working life.



Aluminum Alloy Body

- Heavily anodized for durability
- Wide hook opening 1/2" (12mm)
- Easy adjustments for precise control
- Separate “balanced” air valve design

Increased Finger Space

- Easier access for operator
- Lighter trigger pull tension
- Reduced trigger travel
- Self-adjusting needle packing assembly (PTFE)



Curved Handle

- Superior fit and feel with reduced operator fatigue and RSI
- Air inlet adjuster “cheater” valve
- 1/4" Universal Thread air inlet

COMPLIANT SPRAY GUN RANGE

Advance HD Compliant Spray Guns utilize high-grade Stainless Steel fluid tips and needles, matched with either Trans-Tech Compliant or HVLP air caps manufactured from Plated Hard Brass for a long and durable working life. Select your Advance HD Compliant Spray Gun preference and nozzle combinations from the charts (below) to achieve optimal performance for your spray process.

| AIR CAP NUMBER AND TYPE | AIR CONSUMPTION BAR (psi) RECOMMENDED | AIR INLET PRESSURE | TYPICAL FLUID SIZE mm* | TYPICAL FAN PATTERN* | PRESSURE | GRAVITY | SUCTION |
|-------------------------|---------------------------------------|--------------------|------------------------|----------------------|---------------------------------------------------------------------------|------------------------------------|-----------------------------|
| No. 500R (HVLP) | 195 l/min (7 scfm) | 1.0 bar (14 psi) | 130-190 | Round spray | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | 1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm | 1.6mm, 1.8*mm, 2.0mm, 2.2mm |
| No. 505 (HVLP) | 385 l/min (13.6 scfm) | 1.3 bar (19 psi) | 130-190 | 270 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | 1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm | 1.6mm, 1.8*mm, 2.0mm, 2.2mm |
| No. 590HV (HVLP) | 200 l/min (7.1 scfm) | 1.0 bar (14 psi) | 0-150 | 120 | 0.5mm, 0.7mm, 1.0mm | | |
| No. 510 Trans-Tech | 283 l/min (10 scfm) | 2 bar (29 psi) | 160-220 | 270 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | 1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm | 1.6mm, 1.8*mm, 2.0mm, 2.2mm |
| No. 513 Trans-Tech | 394 l/min (14.1 scfm) | 2 bar (29 psi) | 200-800 | 350 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | 1.3mm, 1.6mm, 1.8*mm, 2.0mm, 2.2mm | 1.6mm, 1.8*mm, 2.0mm, 2.2mm |
| No. 515 Trans-Tech | 364 l/min (12.9 scfm) | 2 bar (29 psi) | 200-400 | 320 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm, 2.8*mm | | |
| No. 520 Trans-Tech | 284 l/min (10 scfm) | 2 bar (29 psi) | 150-250 | 280 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm, | | |
| No. 522 Trans-Tech | 410 l/min (14.5 scfm) | 2 bar (29 psi) | 200-600 | 350 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm, 2.8*mm | | |
| No. 523 Trans-Tech | 410 l/min (14.5 scfm) | 2 bar (29 psi) | 200-400 | 300 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm, 2.8*mm | | |
| No. 590 Trans-Tech | 218 l/min (7.8 scfm) | 2 bar (29 psi) | 0-150 | 150 | 0.5mm, 0.7mm, 1.0mm | | |
| No. 591 Trans-Tech | 218 l/min (7.8 scfm) | 2 bar (29 psi) | 0-150 | 150 | 0.5mm, 0.7mm, 1.0mm | | |

No. 505 (HVLP) and No. 500R (HVLP) air caps operate at 0.7 bar (10 psi) at the cap. All illustrated flow rates and fan sizes may vary according to paint/material viscosity and pressure used.

CONVENTIONAL SPRAY GUN RANGE

Advance HD Conventional Spray Guns utilize high-grade Stainless Steel fluid tips and needles, matched with Conventional air caps manufactured from Plated Hard Brass for a long and durable working life. Select your Advance HD Conventional Spray Gun preference and nozzle combinations from the charts (below) to achieve optimal performance for your spray process.

| AIR CAP NUMBER AND TYPE | AIR CONSUMPTION BAR (psi) RECOMMENDED | AIR INLET PRESSURE | TYPICAL FLUID SIZE mm* | TYPICAL FAN PATTERN* | PRESSURE | GRAVITY | SUCTION |
|-------------------------|---------------------------------------|--------------------|------------------------|----------------------|-------------------------------------------------------------------|----------------------------------------------------|--------------------------------------|
| No. 430 Conventional | 339 l/min (12 scfm) | 3.5 bar (50 psi) | 200-280 | 200 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm |
| No. 443 Conventional | 345 l/min (12.6 scfm) | 3 bar (45 psi) | 200-300 | 300 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | 1.2mm, 1.3mm, 1.8*mm, 2.0mm, 2.2*mm | 1.6mm, 1.8*mm, 2.0mm, 2.2mm |
| No. 462 Conventional | 380 l/min (13.5 scfm) | 3 bar (45 psi) | 500-3000 [†] | 450 [†] | 2.2*mm [†] , 2.8*mm [†] | | |
| No. 470 Conventional | 465 l/min (16.4 scfm) | 3 bar (45 psi) | 500-1800 [†] | 420 [†] | 2.2*mm [†] , 2.8*mm [†] | 2.8*mm | |
| No. 477 Conventional | 480 l/min (17 scfm) | 3 bar (45 psi) | 200-800 | 430 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | | |
| No. 497 Conventional | 510 l/min (18 scfm) | 3.5 bar (50 psi) | 200-600 | 380 | 0.85mm, 1.0mm, 1.2mm, 1.3mm, 1.4*mm, 1.6mm, 1.8*mm, 2.0mm, 2.2*mm | | |

Part numbering and packaging

Advance HD spray gun kits are packaged as: Pressure gun only; Suction gun with 1 liter cup; and Gravity Feed kits including .568 ml standard gravity cup.

Example of Advance HD Spray Gun part numbering:

ADV-P430 means ...

ADV = Advance Gun / P = Pressure / 430 = Conventional Air Cap / 14 = 1.4mm Fluid Tip and Needle

* Hardened & tungsten carbide tips and needles are available in these sizes.
† = ceramic material

Spray gun inlet thread sizes and type:

Air Connection ¼" (m) Universal Thread size, accepts BSP and/or NPS connectors.
Fluid Connection ⅝" (m) Universal Thread size, accepts BSP and/or NPS connectors.

OPTIONAL ACCESSORIES



Gravity Cup
GFC-501



Suction Cup
KR-556-1-B



Gravity Cup (Blue polyester)
GFC-511 - For difficult fluids.

Fluid Filter Kit

1. VSA-512 St/St Fluid Filter Kit (inc. 3 elements)
2. Tungsten Carbide and Hardened Tips/Needles (abrasive materials)
3. Nylon Tipped Needle



The brands you trust

Carlisle Fluid Technologies, a wholly-owned subsidiary of Carlisle Companies Incorporated, is dedicated to providing customers industry-leading solutions for the supply, control, application and curing of a wide range of paints, powders, sealants, adhesives and other application materials. From manual finishing equipment, to highly automated mass-production installations, the company solves customers' material application challenges through the combination of product innovation and decades of technical expertise. Focused on efficient, cost-effective global solutions for the transportation and other industrial markets, the company offers an expanding collection of pioneering product brands – BGK™, Binks®, DeVilbiss®, Hosco®, ms® and Ransburg®.

Let's start a conversation

We want to work together to help answer your application challenges. To learn more about what we can offer, visit our website at **CarlisleFT.com** or call us today.



youtube.com/CarlisleFluidTechnologiesGlobal



[@CarlisleFT](https://twitter.com/CarlisleFT)



linkedin.com/company/Carlisle-Fluid-Technologies

CET

DISTRIBUTED BY COATING EQUIPMENT TECHNOLOGY, INC.
store.cetinc.com • (586) 210-0555

CARLISLE
FLUID TECHNOLOGIES

North America
EMEA
China
Japan

1.800.992.4657
44.0.1202.571111
86.21.33730108
81.45.785.6421

marketing@carlisleft.com
marketing-eu@carlisleft.com
mkt_cn@carlisleft.com
jp-rans-tokyosales@carlisleft.com

BGK
A CARLISLE BRAND

BINKS
A CARLISLE BRAND

DEVILBISS
A CARLISLE BRAND

Hosco
A CARLISLE BRAND

ms
A CARLISLE BRAND

Ransburg
A CARLISLE BRAND

Carlisleleft.com

©2022 Carlisle Fluid Technologies, Inc. | Models and specifications subject to change without notice.
All rights reserved. | Form No. 02-349-01